









# Accessories - Clamping arms • Metallic wipers

## Calculation of the flow rate • Calculation of the clamping force



### Dimensions for special clamping arms

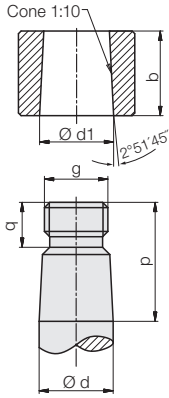


### Clamping arm, max. 70 bar

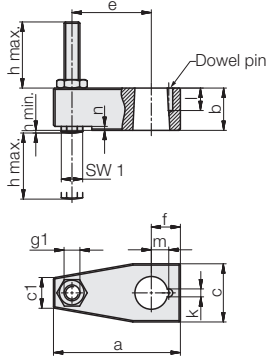

### Special clamping arm

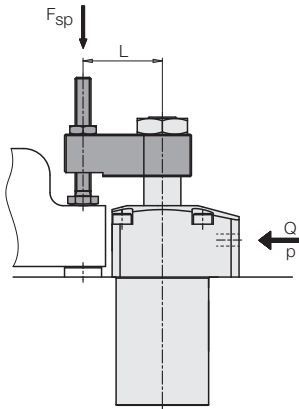

Adm. flow rate and clamping time as a function of the clamping arm extension

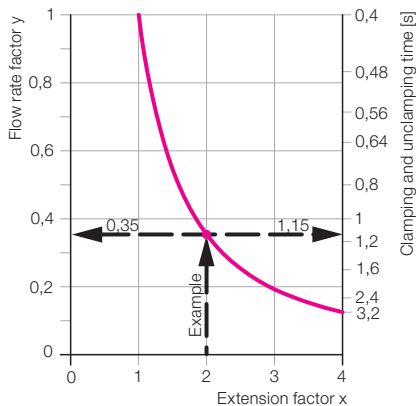

### Swing clamps

	1853	1854	1856	1857
a	48	65	96	114
b	16	25	27	35
c	22	34	52	60
c1	12	19	31	36
Ø d	14	22	30	36
Ø d1 -0.05	14	22	30	36
e	30	40	60	70
f	11	17	25	30
g	M12	M18x1.5	M24x1.5	M30x1.5
g1	M6	M8	M12	M16
h min.	1	1	1	1
h max.	40	46	54	63
Ø k +0.1	3	3	6	6
l +0.5	8.5	8.5	12.5	12.5
m ±0.05	6.6	10.3	15	18.1
n	1.5	2.5	6	8
p	22.5	34	37	47
q	8.5	11.5	12.5	15.5
SW 1	8	10	18	24
Moment of inertia of J <sub>e</sub> [kgmm <sup>2</sup> ]	44	230	1284	3247

### Part no.

Clamping arm with contact bolt and dowel pin	<b>0354243</b>	<b>0354249</b>	<b>0354254</b>	<b>0354256</b>
Dowel pin	3 m 6x8	3 m 6x8	6 m 6x12	6 m 6x12
	<b>3301854</b>	<b>3301854</b>	<b>3300325</b>	<b>3300325</b>
Metallic wiper	<b>0341227</b>	<b>0341228</b>	<b>0341229</b>	<b>0341230</b>

### Admissible flow rate

With the accessory clamping arm and the admissible flow rate as per chart (page 3) the shortest clamping time is approx. 0.4 seconds. Longer special clamping arms have a higher torque of inertia. To avoid an overload of the swing mechanism, the flow rate has to be reduced:

$$Q_L = Q_e \cdot \sqrt{\frac{J_e}{J_L}} \text{ cm}^3/\text{s}$$


Q<sub>e</sub> = Flow rate as per chart (page 3)  
 Q<sub>L</sub> = Flow rate with special clamping arm  
 J<sub>L</sub> = Torque of inertia accessory clamping arm  
 J<sub>e</sub> = Torque of inertia special clamping arm

If the torques of inertia are not known, the admissible flow rate can be determined according to the following example:  
 Conditions: The special clamping arm is longer, has however the form (cross section) of the accessory clamping arm, as shown on the left.

**Example:** Swing clamp 1853T090R16  
 L = 60 mm  
 e = 30 mm as per above chart  
 Q<sub>e</sub> = 13.5 cm<sup>3</sup>/s (as per chart page 3)

1. Extension factor  $x = \frac{L}{e} = \frac{60 \text{ mm}}{30 \text{ mm}} = 2$
2. Flow rate factor as per diagram → y = 0.35
3. Max. flow rate Q<sub>L</sub> = y \* Q<sub>e</sub> = 0.35 \* 13.5 cm<sup>3</sup>/s = 4.7 cm<sup>3</sup>/s
4. Min. clamping time as per diagram → approx. 1.15 s

### Throttling of the flow rate



### Calculation of the clamping force

The diagrams on page 3 show the effective clamping force with accessory clamping arm (L = e).

With longer clamping arms (L > e) the degree of efficiency is reduced. This is considered in the following calculation.

The constants (A...E) for the 4 sizes are shown in the chart.

Constant	1853	1854	1856	1857
A	29.68	15.68	7.06	4.35
B	0.177	0.069	0.023	0.013
C	102.9	260.5	853.8	1596
D	3053	4087	6026	6939
E	18.2	17.86	19.55	20.86

### Effective clamping force

$$F_{Sp} = \frac{p}{A + (B * L)} \leq F_{adm.} \text{ [kN]}$$

### Admissible clamping force\*)

$$F_{adm} = \frac{C}{L} \text{ [kN]}$$

### Admissible operating pressure

$$p_{adm} = \frac{D}{L} + E \leq 70 \text{ [bar]}$$

L = special length [mm]    p = pressure [bar]

\*) With a desired clamping arm length L the clamping force must not exceed the admissible value.

**Example:** Swing clamp 1853T090R16  
 Special clamping arm L = 60 mm

### 1. Admissible clamping force\*)

$$F_{adm} = \frac{C}{L} = \frac{102.9}{60} = 1.71 \text{ kN}$$

### 2. Admissible operating pressure

$$p_{adm} = \frac{D}{L} + E = \frac{3053}{60} + 18.2 = 69 \text{ bar} < 70$$

### 3. Effective clamping force

$$F_{Sp} = \frac{p}{A + (B * L)} = \frac{69}{29.68 + (0.177 * 60)} = 1.71 \text{ kN}$$

# Accessories

## Pneumatic position monitoring • Mounting body

### Application

The pneumatic position monitoring signals the following conditions by closing two bore holes:

1. Piston extended and clamping arm in off-position.
2. Piston in clamping area and clamping arm in clamping position.

For each control function, a pneumatic line has to be provided at the clamping fixture.

### Description

The cartridge type of the pneumatic position monitoring can be easily retrofitted at all swing clamps with switch rod (185XQ0XX).

When moving to a switching position, the air pressure in the supply line increases and operates a differential pressure switch or an electro-pneumatic pressure switch.

### Pneumatic port


#### Cartridge type

The swing clamp with the mounted position monitoring and inserted O-rings is put into the location hole and immediately ready for use.

#### Mounting body

The mounting body is put onto the cartridge-type version and held by the supplied safety ring. The pneumatic ports M5 can be rotated by 360°.

### Monitoring by pneumatic pressure switch

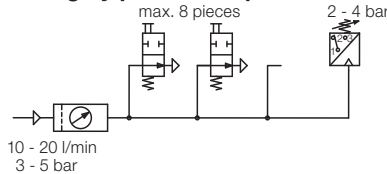

For the evaluation of the pneumatic pressure increase standard pneumatic pressure switches can be used. With one pressure switch up to 8 position monitorings can be controlled (see circuit diagram).

It has to be considered that process-safe functioning of pneumatic controls is only guaranteed with throttled air pressure and air flow rate.


### Technical data

Connection	Drilled channels or threads M5
Nominal diameter	2 mm
Max. air pressure	10 bar
Range of operating pressure	3...5 bar
Differential pressure*) at 3 bar system pressure	min. 1.5 bar
5 bar system pressure	min. 3.5 bar
Air volume **)	10...20 l/min


\*) Minimum pressure difference, if one or several position monitorings are not operated.

\*\*) For measuring of the flow rate appropriate devices are available.


### Function chart

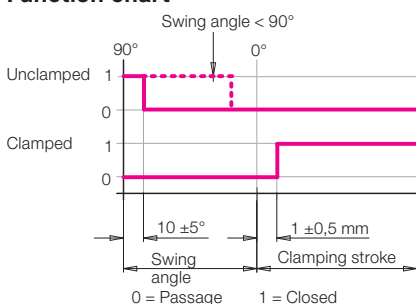


### Cartridge type

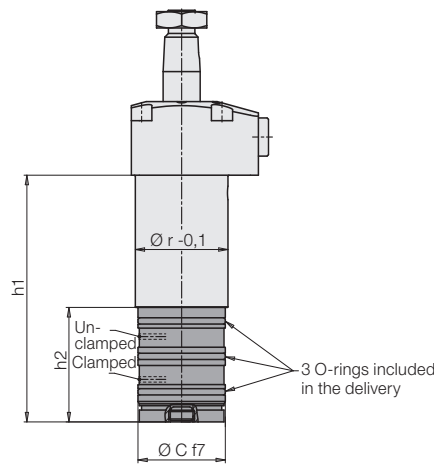


### Connection: pipe thread

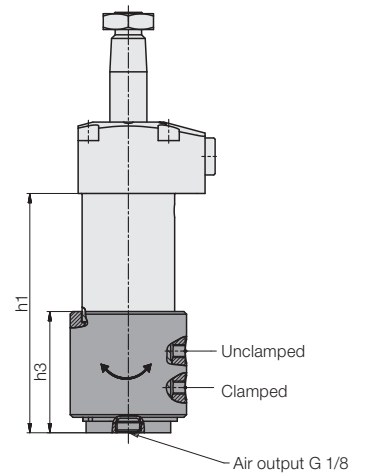

### Location hole

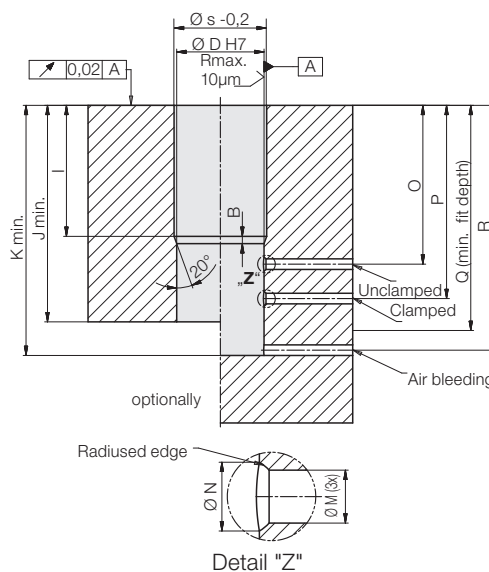

### Mounting body



Swing clamps	1853Q0XX	1854Q0XX	1856Q0XX	1857Q0XX
Ø A [mm]	35	47	63	78
B [mm]	2.5-0.5	2.5-0.5	2.5-0.5	2.5-0.5
Ø C f7 [mm]	33	42	45	45
Ø D H7 [mm]	33	42	45	45
Ø E [mm]	44	53	56	56
F [mm]	40	47	48.8	50.8
G [mm]	14.95	16.35	13.4	14.05
H [mm]	28.75	33.35	35.4	36.75
h1 [mm]	90.5	110	132	141
h2 [mm]	42	49	55	57
h3 [mm]	46	53	54.8	56.8
I [mm]	49.5	62	78	85
J min. [mm]	83	101.5	123.5	132.5
K min. [mm]	94.5	114	136	145
Ø M [mm]	4	4	4	4
Ø N [mm]	5	5	5	5
O [mm]	60	73.5	89.5	96.5
P [mm]	73	90.5	111.5	118.5
Q min. [mm]	85	103	125	134
R [mm]	92.5	112	134	143
Ø r -0.1 [mm]	35	47	63	78
Ø s -0.2 [mm]	36	48	64	79

### Part no. Cartridge type

Swing angle	0353918	0353924	0353928	0353941
0° or 90°	03539180XX	03539240XX	03539280XX	03539410XX
15° to 75° = XX*)				

### Part no. Mounting body for retrofitting of the cartridge type

0353950	0353951	0353952	0353953
---------	---------	---------	---------

\*) in gradation of 5° (see page 2, "swing angle  $\alpha < 90^\circ$ ")

# Accessories

## Electrical position monitoring • Important notes • Wiper system

### Application

The electrical position monitoring signals the following conditions due to damping of two inductive proximity switches:

1. Piston extended, clamping arm in off-position.
2. Piston in clamping area, clamping arm in clamping position.

For each control function, an electrical line has to be provided at the clamping fixture.

### Description

The electrical position monitoring can be easily retrofitted at all swing clamps with switch rod (185XQ0XX).

Included in our delivery are:


- 1 Signal sleeve with screws
- 1 Adapter with 4 countersunk screws
- 1 Control housing with 3 set screws
- 2 Inductive proximity switches with right angle plug (if ordered)

The signal sleeve is screwed onto the switch rod.

The adapter is mounted with 4 countersunk screws at the bottom cover.

The control housing can be put onto the adapter in any angular position and locked with 3 set screws.

For information on adjustment of proximity switches, see operating manual.

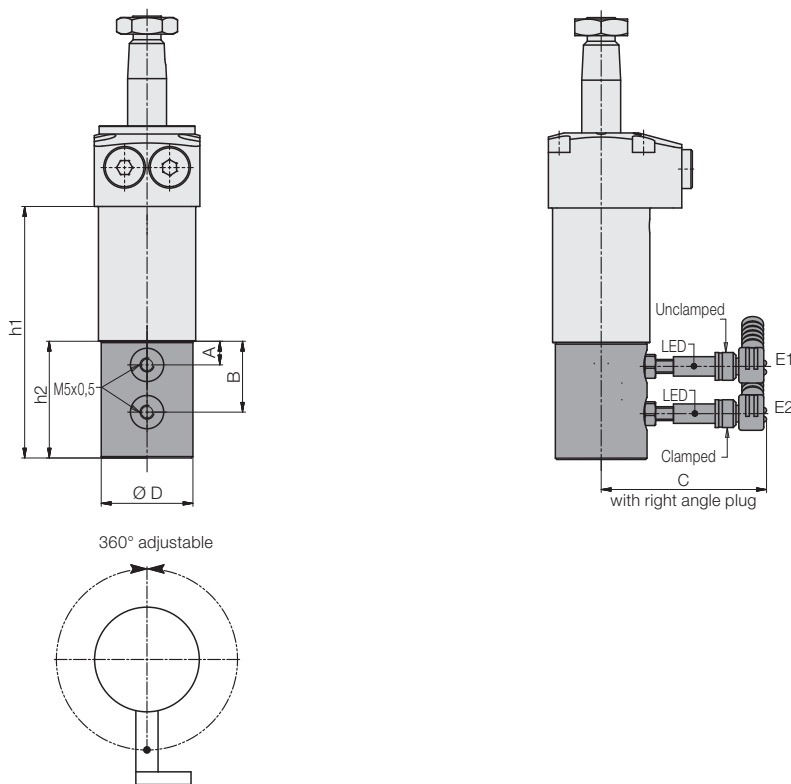

Possible position of the proximity switches


### Important notes

Inductive position monitorings are not suitable for the use in coolant and swarf areas. According to the corresponding application conditions, safety measures have to be planned and checked later on.

### Technical data

Operating voltage	10...30 V DC
Max. residual ripple	10%
Max. constant current	100 mA
Switching function	interlock
Output	PNP
Housing material	stainless steel
Thread	M 5 x 0.5
Code class	IP 67
Ambient temperature	-25...+70 °C
LED Function display	yes
Protected against short circuits	yes
Connection type	Plug
Length of cable	5 m

### Function chart

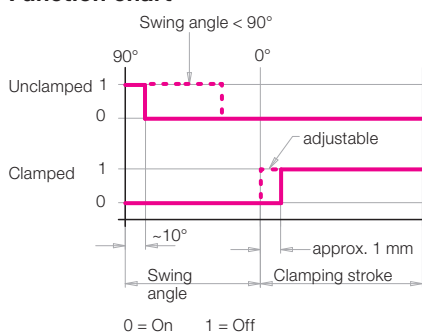

Swing clamps	1853Q0XX	1854Q0XX	1856Q0XX	1857Q0XX
A	[mm] 8.5	8.5	8.5	8.5
B	[mm] 25.5	30.5	37.5	39.5
C approx.	[mm] 59.5	61	62	62
Ø D	[mm] 33	42	45	45
h1	[mm] 90.5	110	132	141
h2	[mm] 42	49	55	57
<b>Part no. Swing angle 0° or 90°</b>				
with switch and plug	<b>0353920</b>	<b>0353926</b>	<b>0353930</b>	<b>0353943</b>
without switch and plug	<b>0353923</b>	<b>0353927</b>	<b>0353931</b>	<b>0353944</b>
<b>Part no. 15° to 75° = XX*</b>				
with switch and plug	<b>0353920XX</b>	<b>0353926XX</b>	<b>0353930XX</b>	<b>0353943XX</b>
without switch and plug	<b>0353923XX</b>	<b>0353927XX</b>	<b>0353931XX</b>	<b>0353944XX</b>
<b>Part no. Spare parts</b>				
Inductive proximity switch	<b>3829198</b>	<b>3829198</b>	<b>3829198</b>	<b>3829198</b>
Right angle plug 5 m	<b>3829099</b>	<b>3829099</b>	<b>3829099</b>	<b>3829099</b>

\*) in gradation of 5° (see page 2, "swing angle  $\alpha < 90^\circ$ ")

### Important notes

Swing clamps must only be used for clamping of workpieces in industrial applications and may only be operated with hydraulic oil. They can generate very high forces. The workpiece, the fixture or the machine must be in the position to compensate these forces.

In the effective area of piston rod and clamping arm there is the danger of crushing.

The manufacturer of the fixture or the machine is obliged to provide effective protection devices. The swing clamp has no overload protection device. When mounting the clamping arm, the clamping arm or the hexagon socket in the piston have to be backed up for tightening or untightening the fixing nut.

During loading and unloading of the fixture and during clamping a collision with the clamping arm has to be avoided.

Remedy: Mount position adaptor.

### Wiper system

The standard FKM wiper has a high chemical resistance against most cooling and cutting fluids.

The optional metallic wiper protects the FKM wiper against mechanical damage due to big or hot swarf.

It consists of a radially floating wiping disk and a retaining disk.

The metallic wiper can be delivered already mounted ("M") or as an accessory for retrofitting (see page 4).

#### Attention!

The metallic wiper is not suitable for dry machining or minimum quantity lubrication. Also in applications with very little grinding swarf, the standard FKM wiper has a better protection effect.

If there is any danger that small particles stick to the piston rod, the metallic wiper disk can also be replaced by a hard plastic disk.